


**SS SAMPLING VALVE
WITH FLANGES
VERTICAL LINE
MULTIPLE FUNCTION**

**EDELSTAHL-PROBENAHMEVENTIL
MIT FLANSCHANSCHLUSS
VERTIKALE ROHRLEITUNG
MULTIFUNKTIONELL**

**PRELEVEUR AC. INOX
AVEC BRIDES
MONTAGE VERTICAL
MULTIFONCTION**

**Material | Werkstoff | Matière ²
1.4435 / 1.4404 (316L)/PTFE**

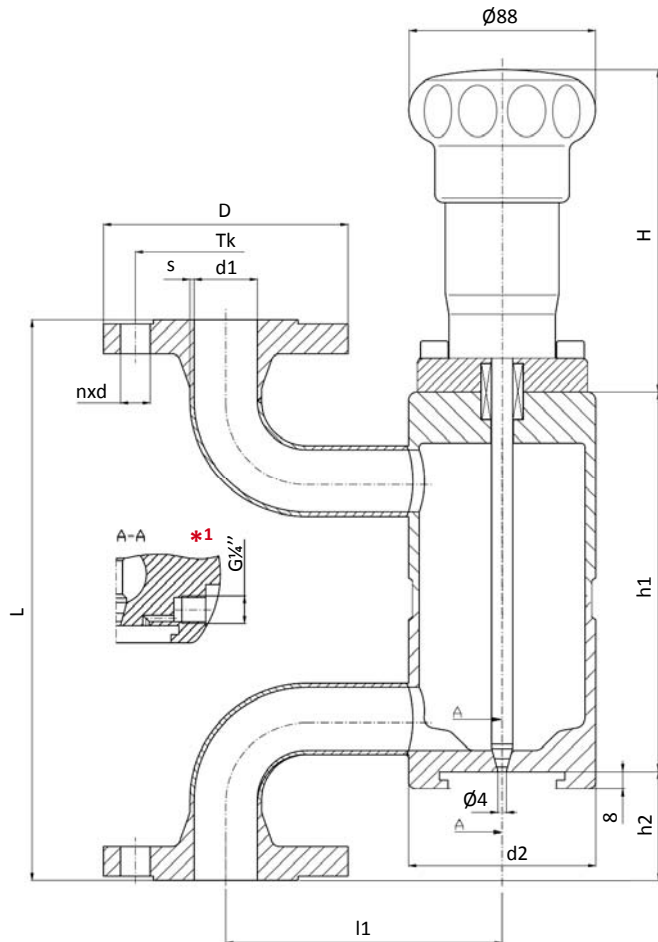

Dimensions/Abmessungen in mm

DIN - EN															
DN	L	H	l1	h1	h2	s	d1	d2	D		Tk		nxd		kg
									PN16	PN40	PN16	PN40	PN16	PN40	
15	250	152	130	179	44	1.6	18.1	87	95		65		4x14		9.3
25	263		130		52		29.7		115		85				
32	278		170		58.3		38.4		140		100				
40	296		170		67		44.3		150		110				
50	329		170	67	55.1	2.6	70.9	113	165	125	4x18		11.1		
65	403		200	233	93.15		83.7	113	185	145	4x18	8x18	12.7		
80	442		200	241	113		109.1	141.3	200	160	8x18				
100*	541		250	298	135		109.1	141.3	220	235	180	190	8x18	8x22	

PS	TS	-40	0	100	150	200
	PN16	16	16	15.1	13.7	12.7
	PN40	16	16	16	16	16

ANSI															
ANSI	L	H	l1	h1	h2	s	d1	d2	D		Tk		nxd		kg
									150#	300#	150#	300#	150#	300#	
1	296	152	130	179	52	2	29.7	87	108	124	79.2	88.9	4x15.7	4x19.1	
1½	332		170		67		44.3	127	156	98.6	114.3	4x22.4			
2	365		170		67		55.1	152	165	120.7	127	4x19.1			
3	478		200	241	113	83.7	113	190	210	152.4	168.1	8x19.1			
4*	599		250	298	135	109.1	141.3	229	254	190.5	200.2	8x19.1	8x22.4		

PS	TS (°F/°C)	-20/-29	0/-18	200/94	300/149	400/205
	150# (psi/bar)	232 / 16	232 / 16	195 / 14	175 / 12	160 / 11
	300# (psi/bar)	232 / 16	232 / 16	232 / 16	232 / 16	232 / 16

* special execution | Sonderausführung | exécution spéciale

¹ vent hole connection | Entlüftungsbohrung-Anschluss | connexion d'évent p. 5.010

² other material on request | anderer Werkstoff auf Anfrage | autres matières sur demande p.3.010